

VIGAS Y PILARES

CARACTERISTICAS

MADERA	Roble pellín
CEPILLADO	En sus 4 caras
SECADO	Al natural
TIEMPO DE SECADO	+ 25 años
CONTENIDO DE HUMEDAD	14%
USO	Estructural

MEDIDAS

TIPO	NOMBRE	ESPESOR PULGADAS	ANCHO PULGADAS	ESPESOR (MM)	ANCHO (MM)
2"	2 x 2	2	2	40	40
	2 x 3	2	3	40	70
	2 x 4	2	4	40	90
	2 x 5	2	5	40	120
	2 x 6	2	6	40	140
	2 x 8	2	8	40	190
	2 x 10	2	10	40	235
3"	3 x 3	3	3	70	70
	3 x 4	3	4	70	90
	3 x 5	3	5	70	120
	3 x 6	3	6	70	140
	3 x 8	3	8	70	190
	3 x 10	3	10	70	235
	4"	4 x 4	4	4	90
4 x 5		4	5	90	120
4 x 6		4	6	90	140
4 x 8		4	8	90	190
4 x 10		4	10	90	235


TERMINACIONES



- Mas de 2.000 colores disponibles
- Variedades de brillos
- Productos acabados en fabrica
- Listos para instalar



- Largo estándar 2500 y 3600mm.
- Consultar por dimensiones especiales
- Tolerancia espesor y altura 5mm

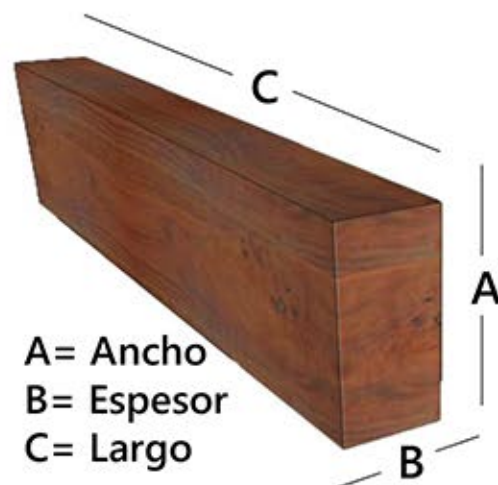

A= Ancho
B= Espesor
C= Largo

Visita nuestros Showrooms: Reina Astrid 842, Las Condes - Santiago / Quintrilpe 520, Vilcun - IX Región



+56 979004753



(43) 264 2969



contacto@codahue.cl